Alle Rechte vorbehalten/ All rights reserved

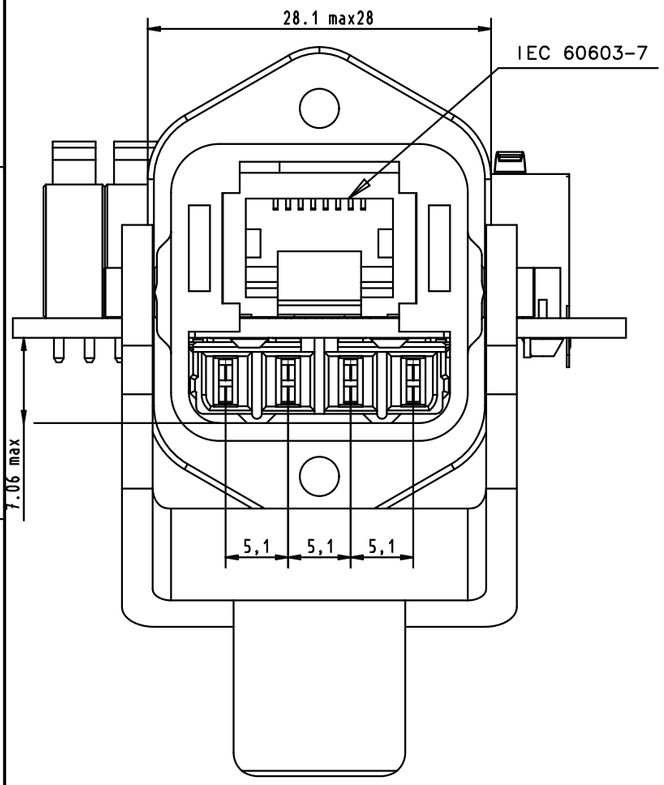

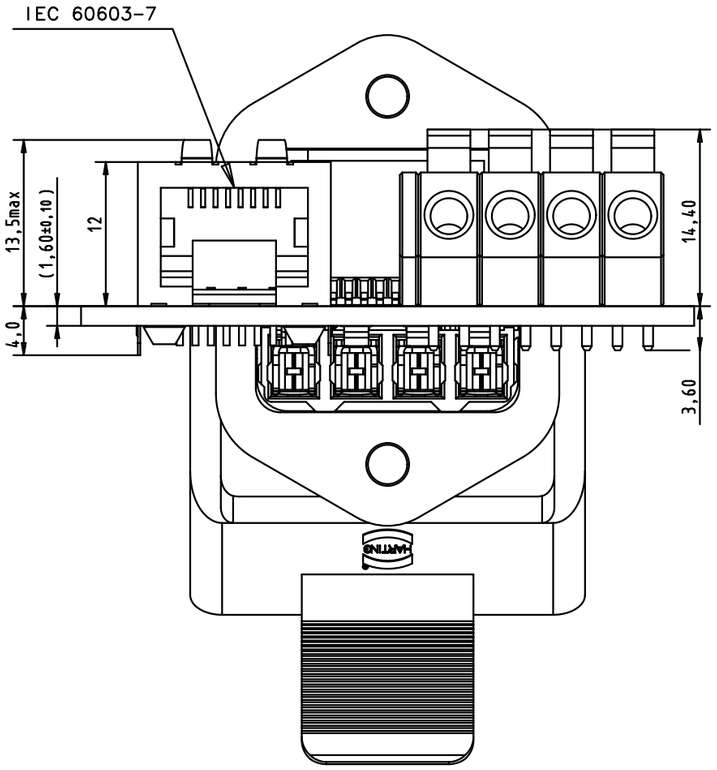

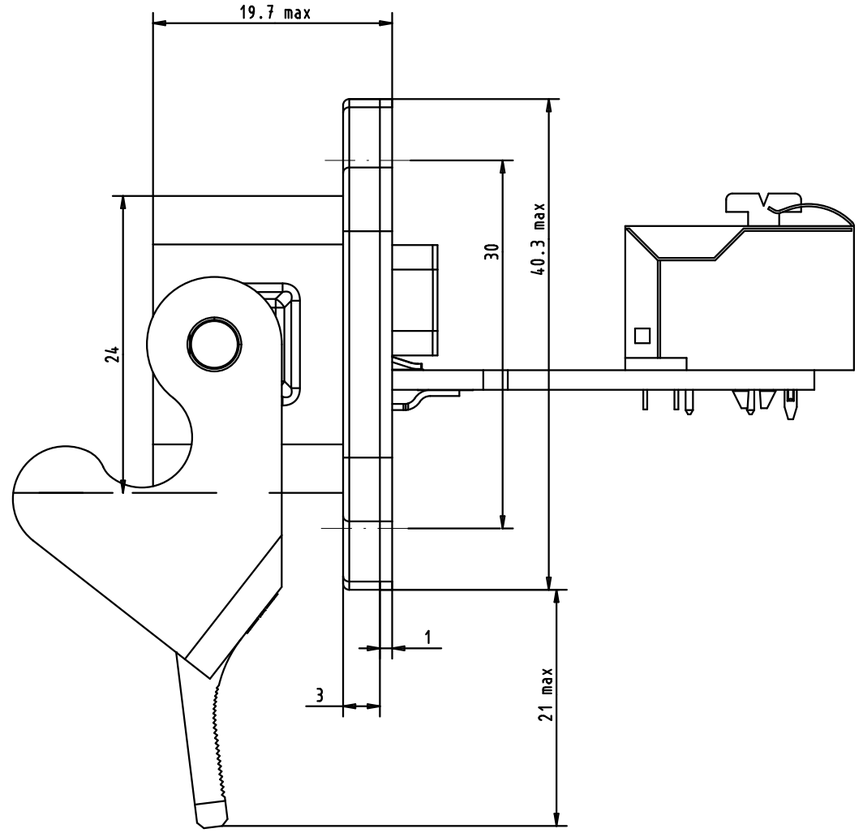

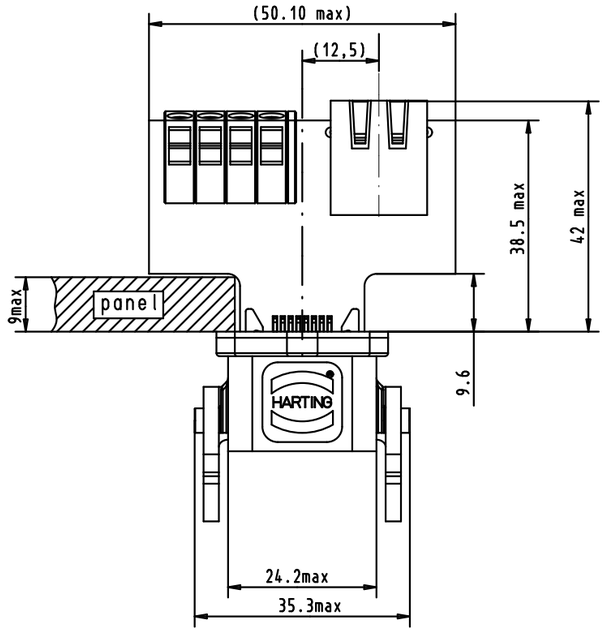

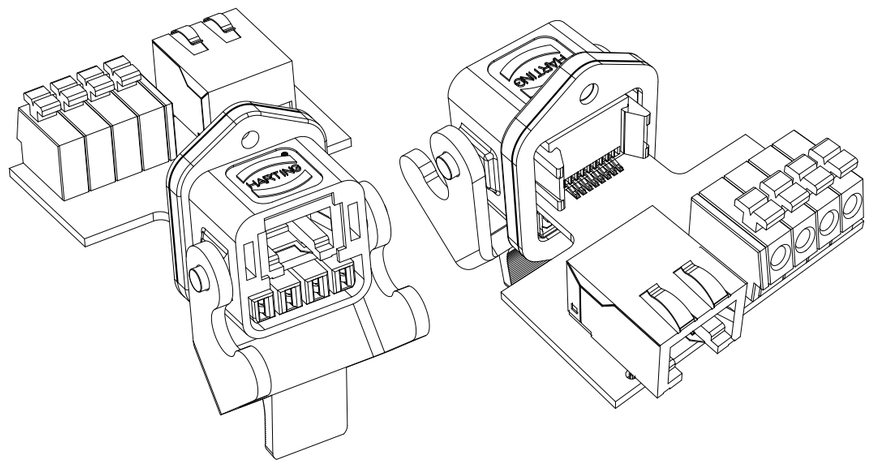

1) recommended wire: 0.5 to 2.5 mm2
2) maximal curent intensity 16 Amps
3) maximal panel thickness 9 mm
4) recommended panel cutout

scale 1:1



5) recommended wire insulator cut



				Dat.	Name		
			Detail.	02/09/03	S.H.	All Dim. in mm Orig. Size DIN A 3	RJ industrial hybrid panel feed through with power cage clamp (16 Amps) and RJ45 modular jack
			Insp.				
31536	02/09/03	S.H.	Stand.				
31529	22/07/03	S.H.	HARTING ELEKTRONIK F-95972 Paris				TB 09 45 225 1300
31350	15/10/02	S.H.					Sub.
Mod.	Dat.	Name					

Maßstab/ Scale

Blatt/ Page